Daily Cleaning
Coffee Factory – Presto - Prestolino

Read the User manual thoroughly. It contains important information regarding safety, hygiene, and usage and ainten maintenance of the machine.

Never reach into the machine during the automatic cleaning and keep away from the beverage outlets. Risk of injury due to scalding!

Machines with water tanks: Fill the tank with fresh filtered water to the level indicator.
Due to the options we offer, your machine and display-screen may look different (Pictures are only examples).
Always follow the instructions on the touch screen!

Menu selection:

1

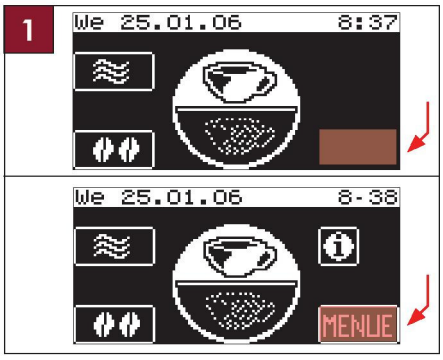

Depending on the status of the machine, the display might show alternative information.

- Press indicated area (see picture) and then on menu

2

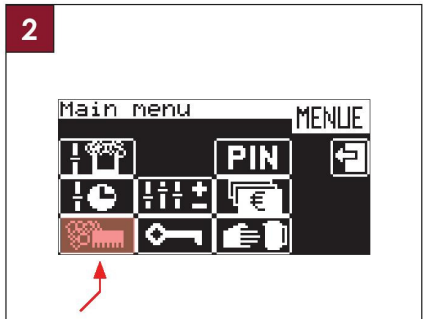

- Press on the cleaning symbol (see picture above)

3

- Press Foamer cleaning for milk system cleaning. (see picture above)

Milk foamer cleaning

4

- Menu selection: see [1] – [3].
- Select **"Foamer cleaning"** Place a suitable container under the outlet (capacity approx 1 litre)
- Follow the instructions on the touch screen.

5

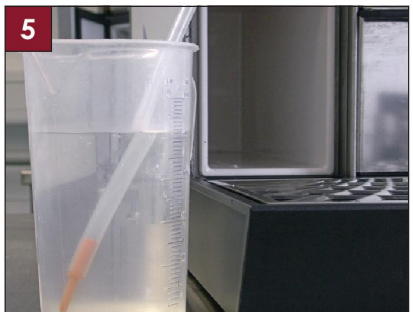

- Mix cleaning agent and **cold** water in a suitable container

Dosage:

Milk steamer cleaner:	20 ml
Cold Water:	250 ml

(refer to label of cleaning agent)

- Place milk hose including nozzle into the cleaning solution.
- Follow the instructions on the touch screen.

6

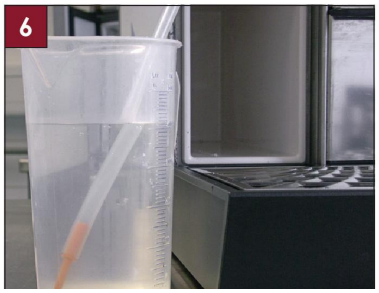

- When the first process has finished, fill the container with approx 350 ml of fresh water.
- Place milk hose including nozzle into the cleaning solution.
- Follow the instructions on the touch screen.

Cleaning process runs for approx 1 min.

Weekly Cleaning
Coffee Factory – Presto - Prestolino

Read the User manual thoroughly. It contains important information regarding safety, hygiene, usage and maintenance of the machine.

Never reach into the machine during the automatic cleaning and keep away from the beverage outlets. Risk of injury due to scalding!

Execute the weekly cleaning process a minimum of **once** per week!
The weekly cleaning is complimentary to the daily cleaning and does not replace it!

Machine Overview

Depending on the options your machine may look different from this picture

Weekly cleaning

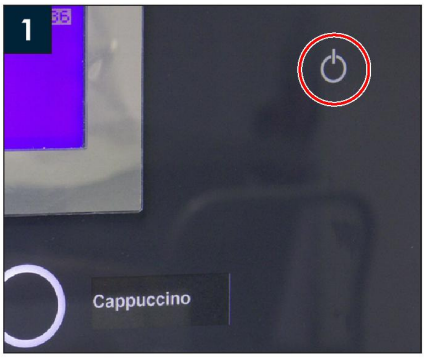

- Switch off machine with the
- Button.

- Remove the milk storage cover.

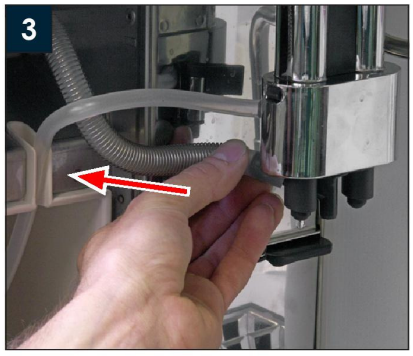

- Remove both the topping and milk hoses from the combi outlet (see picture above).

Weekly Cleaning
Coffee Factory – Presto - Prestolino

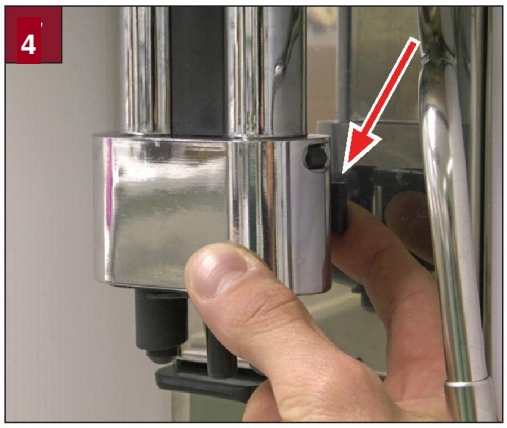

- Press on the release lever (located on the reverse side) of the combi-outlet.
- The inside parts will be ejected automatically

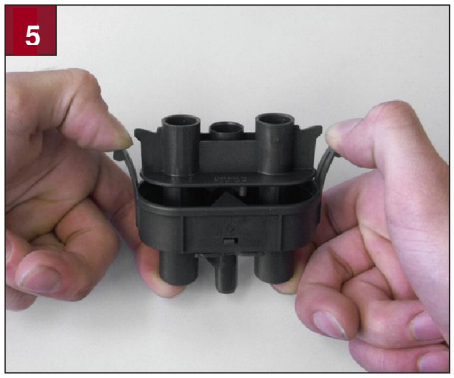

- Place the foamer head in a solution of milk steamer cleaner and **hot** water for approx 30 mins.

Dosage:

Milk steamer cleaner:	20 ml
Cold Water:	250 ml

(refer to label of cleaning agent)

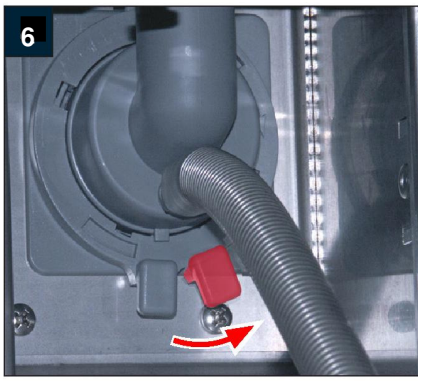

- Turn the lever (as directed) to unlock the mixing bowl.
- Remove the mixing bowl.

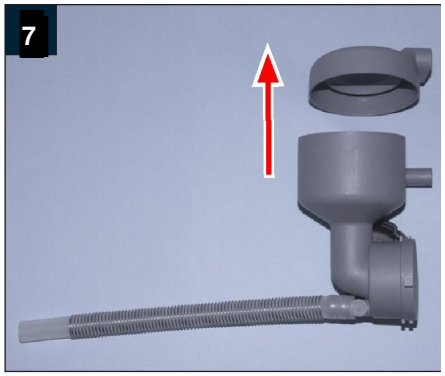

- Dismantle the mixing bowl.
- Clean the parts thoroughly under running (hand) warm water.

Wait until all the parts are completely dry before reinstalling!

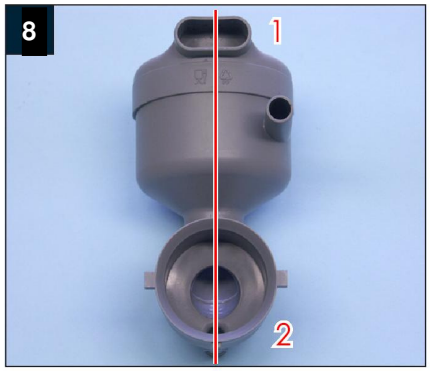

The openings (1 and 2) of the mixing bowl must point in the same direction!

- Re-assemble the mixing bowl.
- Connect the topping hose to the combi-outlet (don't forget the spring)
- Replace the milk storage cover.

Cleaning When Prompted On Display

Coffee Factory – Presto - Prestolino

1

- Select **"Cleaning Mode".**
- Make a selection in the following menu (switch off / switch on).
- Follow the instructions on the touch screen.

2

- Place a suitable container under the outlet (capacity approx 1 litre).

- The cleaner program will clean the milk, mixer and brewing unit systems.
- A cleaning tablet is also required during the cleaning operation which is placed in the decafe chute when prompted by the machine.

Optional Monthly Cleaning

Coffee Factory – Presto - Prestolino

Manual brewer cleaning

When operating movable parts, there is a risk of jamming your fingers.

7

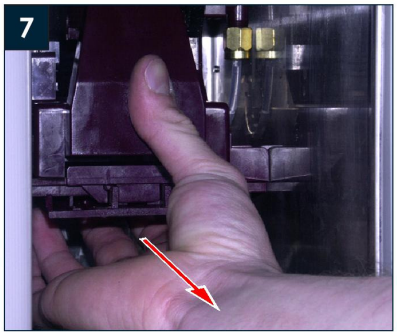

- Switch off machine with the Button.
- Move the combi-outlet to the highest position.
- Remove the grounds container.
- Take out the brewer by holding the base (as shown above) and squeezing the mechanical release.

8

- Lower and tilt the brewer to be able to remove it from the machine.

Keep squeezing the brewer release until it is outside the machine!

9

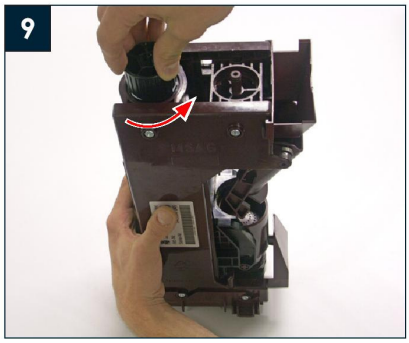

- .Wash the brewer thoroughly under running (hand) warm water.
- Dry the brewer before re-installing.
- Hold the brewer as shown.
- If the brewer becomes misaligned and will not go back into place, use the multi tool adjust.

Never use a dish washer to clean the brewer

Café Corporate
Unit 1 / 8 Haden Crt
Myaree WA 6154

Tel: (08) 9330 15 77
Fax: (08) 9330 1833
www.cafecorporate.com.au